

COROLLA LABEL

Laid paper certify FSC®, made with E.C.F. (Elemental Chlorine Free) pulp. Wet-strength treatment suitable for labelling applications. Available in Premium White and Beige colours.

DESCRIPTION

SIZE	GRAIN	SUSTANCE
72X101	LG	80

RANGE

SUSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH	
ISO 536	ISO 534	ISO 2471		ISO 535	ISO 3781	ISO 1924	
g/m²	cm³/g	%		g/m²	%	kN/m	
		DRY	WET			long±10%	trasv±10%
80 ± 3%	1,22	87 ± 2	≥78	25 ± 4	≥8	5,2	3,2

TECHNICAL
FEATURES

ref. standard/instrument
unit of measure

Brightness - col. Premium
White ISO 2470 105% ± 2

Relative Humidity 50% ± 5
ref. TAPPI 502-98

Roughness Bendtsen (ISO
8791-2) Top .280 ± 40 ml/min.

SPECIFIC
TREATMENTS

ECOLOGICAL
FEATURES




Special runs available upon request.

NOTES

COROLLA LABEL

Corolla Label is an uncoated laid paper suitable for wet glue labels. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

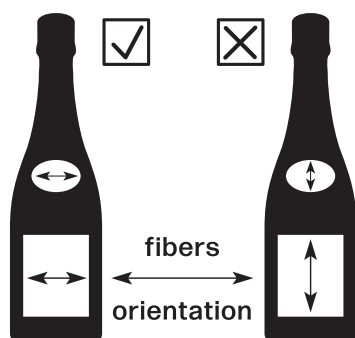

Suitable with the main printing systems: offset, blind embossing, hot foil stamping, thermography, screen printing and bronzing. The macroporous surface requires the use of oxidative drying inks.

PRINTING SUGGESTIONS

The varnish coated with an offset machine is almost fully absorbed and therefore does not improve gloss or protection. Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS