

STUCCO COROLLA LABEL

Laid paper certify FSC®, made with E.C.F. pulp, with "Stucco" coating on top face. This feature ensures extraordinary printing results. It's wet-strength. Available in Premium White and Ivory colours.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X101	LG	85

RANGE

SUBSTANCE	V.S.A.	OPACITY	COBB 60	W.B.R.	DRY TENSILE	DRY TENSILE STRENGTH	
ISO 536	ISO 534	ISO 2471	ISO 535	ISO 3781	ISO 1924		
g/m²	cm³/g	%	g/m²	%	kN/m	kN/m	
					long±10%	cross±10%	
85 ± 3%	1,15	89±2	25 ± 4	≥8	4,5	3	

TECHNICAL FEATURES

ref. standard/instrument unit of measure

Relative Humidity $50\% \pm 5$ ref. TAPPI 502-98













ECOLOGICAL FEATURES


The product is completely biodegradable. Special runs available upon request.

NOTES

STUCCO COROLLA LABEL

Stucco Corolla Label has been specially developed for the label sector to exploit the features of laid products together with printing performance of a coated media. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

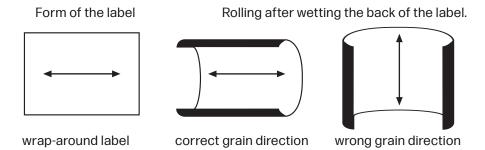

Can be used without problems with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography, screen printing and bronzing. In offset printing the macro-porous surface requires the use of oxidative drying inks.

PRINTING SUGGESTIONS

Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS

