

FEDRIGONI

SPECIAL PAPERS

STUCCO COROLLA LABEL

Laid paper certify FSC®, made with E.C.F. (Elemental Chlorine Free) pulp, with “Stucco” coating on top face. This feature ensures extraordinary printing results. It’s wet-strength. Available in Premium White shade.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X101	LG	85

RANGE

SUBSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH	
		ISO 2471	ISO 2471			ISO 1924	ISO 1924
ISO 536	ISO 534	ISO 2471	ISO 2471	ISO 535	ISO 3781	ISO 1924	ISO 1924
g/m ²	cm ³ /g	%	%	g/m ²	%	kN/m	kN/m
		DRY	WET			long±10%	trasv±10%
85 ± 3%	1,15	88 ± 2	≥ 72	25 ± 4	≥ 8	5,2	3

TECHNICAL FEATURES

ref. standard/instrument
unit of measure

Brightness - col. Premium White- ISO 2470 - 91% ± 2

Relative Humidity 50% ± 5
ref. TAPPI 502-98

Roughness Bendtsen (ISO 8791-2) Top . 220 ± 40 ml/min.



SPECIFIC TREATMENTS

ECOLOGICAL FEATURES


Special runs available upon request.

NOTES

STUCCO COROLLA LABEL

Stucco Corolla Label has been specially developed for wet glue labels. It combines the features of laid products with the printability of a coated support. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

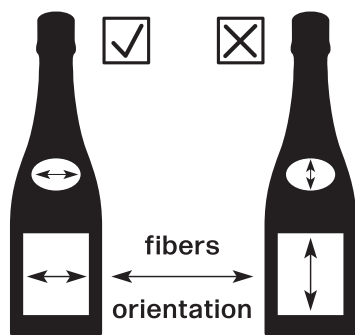

Suitable with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography, screen printing and bronzing. In offset printing the macro-porous surface requires the use of oxidative drying inks.

PRINTING SUGGESTIONS

Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS