

# FEDRIGONI

## SPECIAL PAPERS

# TINTORETTO LABEL

Uncoated felt-marked paper certify FSC®, made with E.C.F. (Elemental Chlorine Free) pulp. Wet-strength treatment suitable for labelling applications. Available in Gesso and Crema colours. It ensures high performances in terms of wet and dry high opacity.

### DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X101	LG	95

### RANGE

SUBSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH	
ISO 536	ISO 534	ISO 2471		ISO 535	ISO 3781	ISO 1924	
g/m <sup>2</sup>	cm <sup>3</sup> /g	%		g/m <sup>2</sup>	%	kN/m	
		DRY	WET			long±10%	trasv±10%
95 ± 3%	1,4	92 ± 2	≥ 88	25 ± 4	≥ 9	6,4	3,8

### TECHNICAL FEATURES

ref. standard/instrument  
unit of measure

Brightness (col. Gesso) ISO 2470 (R457) - 100% ± 2

Relative Humidity 50% ± 5  
ref. TAPPI 502-98

Roughness Bendtsen (ISO 8791-2) Top . 750 ± 100 ml/min.



### SPECIFIC TREATMENTS



### ECOLOGICAL FEATURES

Special runs available upon request.

### NOTES


UNI EN ISO 9001:2015 - CQ 539  
UNI EN ISO 14001:2015 - CQ 7847  
UNI EN ISO 45001:2018 - CQ 26471

PRODUCT DATA SHEET  
PFL/1G5  
Update 05/2024  
Rev. n° 01

# TINTORETTO LABEL

Tintoretto Label is an uncoated, felt-marked paper developed for wet glue labels. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

## APPLICATIONS

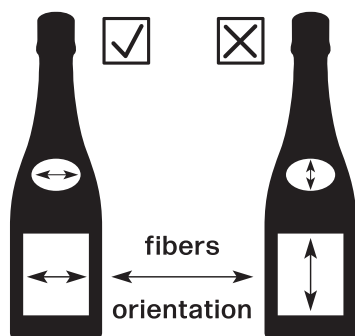

Suitable with the main printing systems: offset, blind embossing, hot foil stamping, thermography, screen printing and bronzing. Its macroporous surface requires the use of oxidative drying inks.

## PRINTING SUGGESTIONS

The varnish printed with an offset machine is almost fully absorbed and therefore it doesn't improve gloss or protection. Good results with major processing operations such as: cutting, die-cutting and glueing.

## CONVERTING SUGGESTIONS