


# SYMBOL CARD HIGHLINE

Environmentally-friendly ECF boards certify FSC®. Double blade coated on top side with a Satin finishing. Available in Premium White shade and in six embossing patterns.

### DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X102	LG	300 400

### RANGE

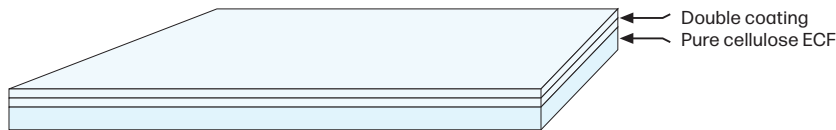

SUBSTANCE	THICKNESS*	ROUGHNESS**	TABER STIFFNESS 15°	
			long ± 15%	cross ± 15%
ISO 536	ISO 534	ISO 8791-2	ISO 2493	
g/m <sup>2</sup>	µm	ml/min	mN	
300 ± 5%	360 ± 10	300 ± 50	150	100
400 ± 5%	480 ± 20	400 ± 50	250	150

### TECHNICAL FEATURES

Ref. to roules/instrument unit of measure

Brightness - ISO 2470 (R457) - 104% ± 2

Relative Humidity 50% ± 5 rif. TAPPI 502-98

\* Before embossed

\*\* Uncoated side



### ECOLOGICAL FEATURES

It's completely recyclable. Symbol Card Highline is produced by special runs available upon request, and need a minimum lot of production. For all the technical features above mentioned, the paper mill provides only measurements before the embossing. The differences between the six embossing patterns, in terms of geometry, depth, direction along and/or against the grain direction, influences proportionally the final product.

### NOTE

# SYMBOL CARD HIGHLINE

Symbol Card Highline is excellent for covers, postcards, brochures, promotional material, greeting cards and similar applications.

## APPLICATIONS

Can be used without problems with the main printing systems: offset, blind embossing, hot foil stamping, thermography and screen-printing. For offset printing, the characteristics of the coated side are comparable to our Symbol Freelifa Satin, and the uncoated side is designed to provide good printability, also with solid colours.

## PRINTING SUGGESTIONS

Good results can be expected with all the main converting process: cutting, die-cutting, scoring, glueing, varnishing and plastic lamination.

## CONVERTING SUGGESTIONS

