

FEDRIGONI

SPECIAL PAPERS

CONTOUR GREASE-PROOF

Uncoated embossed paper for labels with greaseproof treatment, acid-free, made from pure E.C.F. (Elemental Chlorine Free) cellulose pulp, FSC® certified. Available in Bright White shade.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X102	LG	90

RANGE

SUBSTANCE	BULK	OPACITY		COBB 60		W.B.R.	DRY TENSILE STRENGTH*	
		ISO 2471		ISO 535			ISO 1924	
g/m ²	cm ³ /g	%	%	g/m ²	g/m ²	%	kN/m	kN/m
		DRY	WET	WATER	OIL		long±10%	trasv±10%
90 ± 3%	1,3	95 ± 2	≥ 87	25 ± 4	7 - 8	≥ 10	7	3,3

TECHNICAL FEATURES

ref. standard/instrument
unit of measure

Brightness (col. Bright White)
ISO 2470 - 93% ± 2

CIE Whiteness (Bright White)
116% ± 4

Relative Humidity 50% ± 5
ref. TAPPI 502-98

Roughness Bendtsen (ISO 8791-2)*
Top. 1200 ± 200 ml/min.

* Before the embossed



SPECIFIC TREATMENTS

ECOLOGICAL FEATURES


Special runs available upon request.

NOTES

CONTOUR GREASE-PROOF

Contour Grease-Proof is an embossed uncoated paper developed for wet glue labels focused in particular to olive oil and oil products based. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

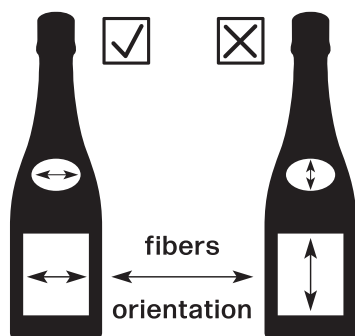

Suitable with the main printing systems: offset, blind embossing, hot foil stamping, thermography, screen printing and flexography. With offset printing, it's recommend the use of UV or H-UV drying inks.

PRINTING SUGGESTIONS

The varnish coated with an offset machine is almost fully absorbed and therefore does not improve gloss or protection. Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS