

FEDRIGONI

SPECIAL PAPERS

CONTOUR WS

Wet-strength uncoated embossed paper for labels, anti-mold, made from pure E.C.F. (Elemental Chlorine Free) cellulose pulp, FSC® certified. Available in Classic White shade.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X102	LG	90

RANGE

SUBSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH*	
ISO 536	ISO 534	ISO 2471		ISO 535	ISO 3781	ISO 1924	
g/m ²	cm ³ /g	DRY	WET	g/m ²	%	long±10%	trasv±10%
90 ± 3%	1,3	90 ± 2	≥ 78	20 ± 4	≥ 11	7,5	3,5

TECHNICAL FEATURES

ref. standard/instrument
unit of measure

Brightness (Classic White)
ISO 2470 - 104% ± 2

CIE Whiteness (Classic White)
142% ± 4

Relative Humidity 50% ± 5
ref. TAPPI 502-98

Roughness Bendtsen (ISO 8791-2)*
Top. 1200 ± 200 ml/min.

* Before the embossed



SPECIFIC TREATMENTS



ECOLOGICAL FEATURES


Special runs available upon request.

NOTES

CONTOUR WS

Contour WS is an embossed uncoated paper developed for wet glue labels. For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

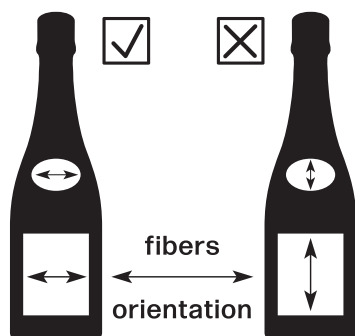

Suitable with the main printing systems: offset, blind embossing, hot foil stamping, thermography and screen printing. The macroporous surface requires the use of oxidative drying inks.

PRINTING SUGGESTIONS

The varnish coated with an offset machine is almost fully absorbed and therefore does not improve gloss or protection. Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS