

ICE-PROOF BRUT DE VÉLIN WS

Wet-strength uncoated felt-marked paper for labels, anti-mould, acid-free and ice-bucket Roof thanks to a patented process (treatment in the mass). The paper is made from pure E.C.F. cellulose pulp, FSC® certified. Available in Alaska shade.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X102	LG	95

RANGE

SUBSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH	
ISO 536	ISO 534	ISO 2471		ISO 535	ISO 3781	ISO 1924	
g/m²	cm³/g	%		g/m²	%	kN/m	
		DRY	WET			long±10%	trasv±10%
95 ± 3%	1,28	93 ± 2	≥ 89	25 ± 4	≥ 12	6,5	3

TECHNICAL
FEATURES

ref. standard/instrument
unit of measure

Brightness (col. Alaska)
ISO 2470 - 101% ± 2

CIE Whiteness (col. Alaska)
123% ± 4

Relative Humidity 50% ± 5
ref. TAPPI 502-98

Roughness Bendsen (ISO
8791-2) Top. 500 ± 100 ml/min.



SPECIFIC
TREATMENTS



ECOLOGICAL
FEATURES


Special runs available upon request.

NOTES

ICE-PROOF BRUT DE VÉLIN WS

For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

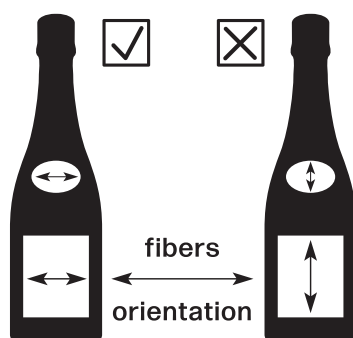

Suitable with the main printing systems: offset, blind embossing, hot foil stamping, thermography, screen printing and flexography. With offset printing, it's recommend the use of UV or H-UV drying inks.

PRINTING SUGGESTIONS

The varnish printed with an offset machine is almost fully absorbed and therefore it doesn't improve gloss or protection. Good results with major processing operations such as: cutting, die-cutting and glueing.

CONVERTING SUGGESTIONS