

LABEL SPLENDORLUX EMBOSSED

Wet-strength high gloss embossed cast-coated paper for labels, acid-free, made from pure E.C.F. cellulose pulp, FSC® certified. The paper is embossed on one side. Available in Premium White shade.

DESCRIPTION

SIZE	GRAIN	SUBSTANCE
72X102	LG	80

RANGE

SUBSTANCE	BULK	OPACITY		COBB 60	W.B.R.	DRY TENSILE STRENGTH	
ISO 536	ISO 534	ISO 2471		ISO 535	ISO 3781	ISO 1924	
g/m²	cm³/g	%		g/m²	%	kN/m	
		DRY	WET			long±10%	trasv±10%
80 ± 3%	1,1	89 ± 2	≥ 78	24 ± 4	≥ 6	7,0	3,9

TECHNICAL
FEATURES

ref. standard/instrument
unit of measure

Brightness - ISO 2470 (R457)
- 91% ± 2

Relative Humidity 50% ± 5
ref. TAPPI 502-98



SPECIFIC
TREATMENTS



ECOLOGICAL
FEATURES


Special runs available upon request.

NOTES

LABEL SPLENDORLUX EMBOSSED

For labelling, always observe the correct indications as regards grain direction. It must be parallel to the base of the bottle (see drawings).

APPLICATIONS

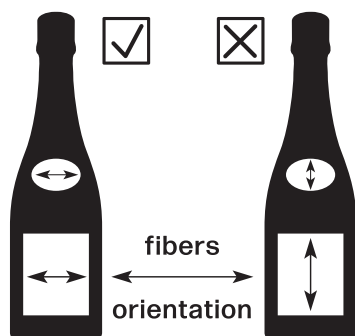

The mirror-like surface permits to obtain particularly brilliant printing results with excellent contrast, details and chromatic saturation. Suitable with the main printing systems: offset, blind embossing, hot foil stamping, screen printing and bronzing. The surface requires the use of oxidative drying inks or UV inks; also control the fountain solution in terms of both pH and conductivity and/or additives to keep emulsifying to minimal levels. For better setting and dry control, we advise against excessive ink loads and recommends the use of antisetoff spray powder and ink drying additives if necessary.

PRINTING SUGGESTIONS

Label Splendorlux Embossed ensures excellent results in conventional or UV varnishing. Excellent results are also achieved with plastic lamination. There are no particular problems for all converting operations.

CONVERTING SUGGESTIONS